


(19)  **Europäisches Patentamt**
European Patent Office
Office européen des brevets



(11) **EP 1 022 937 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.09.2002 Bulletin 2002/39

(51) Int Cl.⁷: **A01J 5/013**

(86) International application number:
PCT/NL98/00587

(21) Application number: **98950512.8**

(87) International publication number:
WO 99/018774 (22.04.1999 Gazette 1999/16)

(22) Date of filing: **13.10.1998**

(54) **INTELLIGENT CLAW**
INTELLIGENTE MELKKLAUE
GRIFFE A LAIT INTELLIGENTE

(84) Designated Contracting States:
DE DK FR GB NL SE

- **ZENTS, Otto, Theodorus, Jozef**
NL-7131 ES Lichtenvoorde (NL)
- **ROOSENBOOM, Derk, Jan**
NL-7481 EJ Haaksbergen (NL)

(30) Priority: **13.10.1997 NL 1007266**
23.10.1997 NL 1007344

(74) Representative: **Prins, Adrianus Willem et al**
Vereenigde,
Nieuwe Parklaan 97
2587 BN Den Haag (NL)

(43) Date of publication of application:
02.08.2000 Bulletin 2000/31

(73) Proprietor: **N.V. Nederlandsche Apparatenfabriek**
NEDAP
NL-7141 DE Groenlo (NL)

(56) References cited:
EP-A- 0 424 801 WO-A-95/22888
WO-A-97/40374 DE-A- 4 000 039
US-A- 5 370 112

(72) Inventors:
• **POSTMA, Ebele, Marten**
NL-7244 NN Barchem (NL)
• **VERSTEGE, Albertino, Bernardo, Maria**
NL-7121 HM Aalten (NL)

- **"GELEIDBAARHEIDSMETING HULP BIJ**
OPSPORING VAN MASTITIS" AGRARISCH
DAGBLAD, 16 January 1992, page 29
XP000253551

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 022 937 B1

Description

[0001] The present invention relates to a device for analyzing milk in order to determine the health of milk animals and/or the quality and composition of the milk obtained from these animals, comprising a milking circuit which forms part of a milking machine and is connected to the milking cups adapted for connection to the teats of the animals, in which milking circuit sensors are disposed within a housing to determine parameters relevant to the health of the animals and/or the quality and composition of the milk, which device further comprises data processing means adapted to process signals determining these parameters and provided by the sensors and to make knowable the processing results thereof.

[0002] Such parameters may relate to the electric conductivity of the milk which may be an indication of mastitis, the temperature of the milk (which is higher in the fertile period of the animal, or when it has, e.g., mastitis) nearly immediately after it has been collected via the milking cups, the cell count (SCC or somatic cell count) of the milk which indicates the degree in which the milk is free from bacteria, and the content in the milk of proteins, fats, progesterone (a hormone which is less produced in the fertile period of the animal), urea, lactose, penicillin, or other antibiotics, etc.

[0003] To determine such quantities, there may be used all kinds of known per se sensors, such as conductivity sensors, temperature sensors, frequency-controlled dielectricity measuring elements, etc.

[0004] These sensors are disposed within a separate housing in the place where they can carry out relevant measurements. In practice, it is known to arrange sensors in different places in the milking circuit of the milking machine, in particular in the milk lines extending from the milking cups, in the milk claw, in a milk meter or milk gauge glass connected thereto, etc. From the sensors the signal lines extend to provide the measured data, while, furthermore, a supply line will extend to the sensors. The signal lines extend to data processing means arranged elsewhere, such as, e.g., a computer for processing the signals provided by the sensors and making knowable the processing results thereof. Such a system has the drawback that relatively long lines are necessary which are rather susceptible to trouble in a parlor in which the milking machine is installed, while in the place where the animals are milked the lines are very susceptible to damage owing to the presence of the animals; the animals may tread milking apparatus, and in particular the different lines, to pieces or tread off the milk hoses.

[0005] It is an object of the invention to remove or at least substantially reduce this drawback.

[0006] According to the invention the device as defined in the preamble is characterized in that the data processing means are arranged in or on the same housing as in which or on which the sensors themselves are

arranged.

[0007] By arranging the data processing means, in particular a microprocessor with associated electronic devices, in or on the same housing as in which or on which the sensors themselves are arranged, the susceptibility to trouble can be substantially reduced. When several sensors, optionally of a different kind, are arranged in or on a housing, the number of signal lines may be substantially limited as well or even be left out completely when in or on the housing of the sensors and the data processing means there are also arranged transmitting means for transmitting the resulting data to receiving means installed elsewhere. The supply line for the data processing means may be left out as well, namely by using a supply source without such a supply line, such as, e.g., a battery or a different supply element which can be arranged at or near the data processing means.

[0008] For some of the above-mentioned parameters it is favorable if they are determined for all the udder quarters separately; this particularly applies to the electric conductivity of the milk to enable the determination of mastitis already at an early stage and the cell count. The sensors for these parameters will therefore preferably be disposed in the milk lines extending from the milking cups or in the milk claw, if at least present. In fact, the milk lines from the milking cups may be passed both directly to a milk collecting buffer, such as a milk meter or milk gauge glass, and via a milk claw from where only one milk line leads to such a milk collecting buffer. For the other parameters stated it is often sufficient or even desirable that they are determined for the mixed milk, i.e. for the milk from the udder quarters together. The sensors for these parameters will therefore preferably be disposed within the milk collecting buffer or within the milk claw or the line from the milk claw to the milk collecting buffer, of course again, if such a milk claw is present. Besides, one or more different sensors may also be disposed in a milk line and also one or more sensors in a milk collecting buffer or in a milk claw. In all these cases, however, the housing for the sensors should be such that the data processing means can be arranged therein and even transmitting means and/or a supply source, if required. Of course, this should not or substantially not impede the through-flow of the milk.

[0009] In a preferred embodiment the device according to the invention is characterized in that the housing for one or more sensors and for the data processing means is formed by a milk claw. In particular, at least one sensor to be contacted with the milk from a relevant udder quarter is then arranged in or near the place where each of the milk lines from the relevant milking cups opens into the milk claw, which sensor is electrically connected to the data processing means fixed to the wall of the milk claw. Thus, in or near the place where the milk lines from the milking cups open into the milk claw, the sensors may be formed by a conductivity sensor and a temperature sensor. The conductivity sensor

and the temperature sensor may then form one whole, i.e. be integrated together; the temperature sensor may be arranged, e.g., in the conductivity sensor. Through this construction not only the conductivity but the temperature of the milk from the individual udder quarters is measured. In case of an inflammation in an udder quarter, both sensors give a deviating value.

[0010] The data processing means may be arranged, in a constructionally favorable manner, on the inside of the upper wall of the milk claw, while one or more further sensors to be contacted with the mixed milk are arranged below the data processing means. In a specific exemplary embodiment each of the sensors in or near the place where the milk lines from the milking cups open into the milk claw is formed by a conductivity sensor, and the sensor arranged below the data processing means is formed by a temperature sensor.

[0011] In an alternative embodiment the data processing means are arranged on the inside of the upper wall of the milk claw, while on the side thereof, below the opening of each of the milk lines from the four milking cups into the milk claw, a sensor is arranged.

[0012] The invention not only relates to a device for analyzing milk but also to a milk claw comprising such a device.

[0013] The invention will now be explained in detail with reference to the accompanying drawings, in which

Fig. 1 shows a milk claw with the device according to the invention in a first embodiment;

Fig. 2 shows a milk claw with such a device in a second embodiment;

Fig. 3 shows the embodiment of the device according to the invention, with this device being included in the milk line between the milking cup and a milk collecting buffer, while

Fig. 4 shows a preferred embodiment of a supply source of the device shown in Figs. 1-3.

[0014] For clarity's sake, the milk claw, as shown in Figs. 1 and 2, only has two connections for a milking cup. When milking goats, this will be sufficient; when milking cows, however, a milk claw will have four of such connections, which are preferably situated symmetrical around the central body of the milk claw.

[0015] Likewise, for clarity's sake, Fig. 3 shows only one of the four milk lines between a milking cup and a common milk collecting buffer.

[0016] Corresponding parts in Figs. 1 and 2 are further indicated by the same reference numerals.

[0017] Fig. 1 shows a milk claw 1 with the device according to the invention in a first embodiment. The milk claw 1 comprises connections 2 for milk lines 3 extending from the milking cups (not shown) and from a discharge connection 4 for a discharge line 5, via which milk obtained through the milking cups from the individual udder quarters of a milk animal is commonly discharged to a milk collecting buffer (not shown) or, if re-

quired, directly to a milk tank. The milk from the individual udder quarters mixing in the milk claw 1 is designated here as mixed milk. Disposed within the connections 2 are known per se electric conductivity sensors 6, the conductivity of the milk being determined between two electrodes 7 in a space of defined size. The space is filled from the top with the milk flowing from the relevant milking cup, while at the bottom of this space a small opening 8 may be present, via which the milk can flow away. In view of the fact that these sensors have long since been known, the operation thereof need not be discussed in detail. Disposed on the inside of the upper wall of the milk claw 1 are the data processing means 9. These data processing means 9 comprise a microprocessor with associated electronic devices adapted to process and make knowable the signals from the sensors outwardly. Connected to the data processing means 9 are the electrodes 7 of the conductivity sensors 6. Within the milk claw 1 is further disposed a temperature sensor 10 connected to the data processing means 9. The signals from the four milk conductivity sensors 6 and the temperature sensor 10 are directly processed in the data processing means 9. This may be referred to as a milk analysis carried out online and on real-time basis. The conductivity values of the milk from the individual udder quarters are then compared to each other, while, moreover, these values are compared to an average value thereof over, e.g., the last ten days. Such processing of milk conductivity values is known per se, but is carried out in the known devices by means of a remotely installed general computer with the inherent drawbacks, as already indicated above. It has been found in practice that the short distance between the electrodes 7 and the data processing means 9 results in a reduced susceptibility to trouble and thus to a greater accuracy in the determination of the milk conductivity, so that mastitis, too, can be signalized in a very early stage in which it is, e.g., latently present only in one udder quarter.

[0018] Similarly, the values measured by the temperature sensor 10 may be processed and compared to the progressive average determined for them before, so that even a gradual change in the temperature of the milk and thus of the animal can already be signalized in good time. Here, too, the great advantage of the more reliable and accurate measurements is obtained through the short distance between the temperature sensor 10 and the data processing means 9. Reporting the results of the data processing outwardly may take place by means of an output cable. To optimally avoid cable work in the milking place, and in particular under the animal, the milk claw 1 comprises a transmitter which, in the figure, is disposed within the data processing means 9. Via this transmitter, deviating conductivity values of the milk from one or more of the udder quarters relative to the other udder quarters, deviations of conductivity values from the progressive average thereof, and deviations of the temperature from the progressive

average thereof are transmitted to a remotely installed receiver coupled to a central computer or specific signaling means. The data processing means 9 may also comprise a receiver for the wireless supply of information to the data processing means 9 at a distance from the milk claw by means of a transmitter. To avoid cable work, the milk claw 1 comprises a battery or a similar supply element.

[0019] But also if a supply line and a data output line are necessary, the advantage is obtained yet that the number of lines is substantially limited as compared to the situation in which individual supply lines and data output lines from the individual sensors were necessary.

[0020] In Fig. 2 a similar milk claw 1 is shown as in Fig. 1, but here the milk conductivity sensors 6 are disposed in the middle of the milk claw 1, namely below the connections 2, while, furthermore, a data output line 11 from the data processing means 9 is shown. Instead of the temperature sensor 10 connected to the data processing means, as shown in Fig. 1, a further sensor 12 is disposed here in the discharge connection 4 of the milk claw 1. The signal lines from this sensor 12 are connected to the data processing means 9 arranged at a short distance therefrom. Here, too, the sensor 12 may be formed by a temperature sensor, although this sensor, like the sensor 10 in Fig. 1, may also be formed by one of the other sensors mentioned above.

[0021] Fig. 3 shows a sensor combination with data processing means in the individual milk lines between the relevant milking cups and a common milk collecting buffer. Although four of such sensor combinations are present, only one is shown. The sensor combination 13 forms part of a through-flow line section 14 which is disposed in the milk line 15 between a relevant milking cup 16 and the common milk collecting buffer 17. The through-flow line section 14 and a part of the milk lines 15 are enlarged, for clarity's sake. The sensor combination comprises a conductivity sensor 18 of the type as already shown in Figs. 1 and 2, a further sensor 19, and the data processing means 20. Within the data processing means there are also disposed a transmitter and a battery or a similar supply element. The sensor 19 may be a temperature sensor or one of the other sensors mentioned above.

[0022] In particular, the sensors 10, 12 and 19 may be formed by a frequency-controlled dielectric sensor, the dielectric being formed by the milk. At specific frequencies the presence of specific amounts of components in the milk, in particular fats and proteins, may be determined by measuring the capacity and conductivity between electrodes. Since such sensors are also known, the operation thereof need not be discussed in detail. Preferably, the device comprises a supply source 22 which, in use, is arranged to generate electric energy on the basis of pulsating air or gas pressure differences in the housing. These pulsating pressure differences are generated, in a manner known per se, in the housing containing the sensors, i.e. in the milking circuit of the

device forming part of a milking device for milking the animals. In the example of Figs. 1 and 2 the supply source 22 is placed in the milk claw to provide the data processing means with energy. In the example of Fig. 3 the supply source 22 is disposed in the through-flow line section 14. The supply-source 22 may consist of, e.g., a housing 24 with an opening 26 closed by a diaphragm 28. The diaphragm 28 is connected with a solid magnetic body 30 which is movably disposed within a coil 32. The pulsating air and gas pressure differences occurring on the outside of the housing 22 will cause the diaphragm 28 to reciprocate the body 30 in the direction of the arrow 34 with the result that a pulsating induction voltage is generated in the coil 32.

[0023] The invention is not limited to the exemplary embodiments described above with reference to the figures, but comprises all kinds of modifications, of course as far as falling within the scope of protection of the following claims. Thus, it is possible that a temperature sensor is assembled with each of the conductivity sensors, so that the conductivity and temperature of the milk from each udder quarter can be measured separately, so that a latent mastitis can be determined in a very reliable manner, since it manifests itself both in a higher conductivity of the milk and in a higher temperature. The result of the processing of the conductivity data and the temperature data may be interrelated with each other.

30 Claims

1. A device for analyzing milk in order to determine the health of milk animals and/or the quality and composition of the milk obtained from these animals, comprising a milking circuit which forms part of a milking machine and is connected to the milking cups adapted for connection to the teats of the animals, in which milking circuit sensors (6, 10) are disposed within a housing to determine parameters relevant to the health of the animals and/or the quality and composition of the milk, which device further comprises data processing means (9) adapted to process signals determining these parameters and provided by the sensors (6, 10) and to make knowable the processing results thereof, **characterized in that** the data processing means (9) are arranged in or on the same housing as in which or on which the sensors (6, 10) themselves are arranged.
2. A device according to claim 1, **characterized in that** in or on the housing of the sensors (6, 10) and the data processing means (9) there are also arranged transmitting means for transmitting the resulting data to receiving means installed elsewhere.
3. A device according to any one of the preceding claims **characterized in that** the housing for one or more sensors (6, 10) and for the data processing

means (9) is formed by a milk claw.

4. A device according to claim 3, **characterized in that** in or near the place where each of the milk lines from the relevant milking cups opens into the milk claw there is arranged at least one sensor to be contacted with the milk from a relevant udder quarter, which sensor is electrically connected to the data processing means fixed to the wall of the milk claw (1).
5. A device according to claim 4, **characterized in that** in or near the place where the milk lines (3) from the milking cups open into the milk claw (1) the sensors (6, 10) are formed by a conductivity sensor (6) and a temperature sensor (10).
6. A device according to claim 5, **characterized in that** the conductivity sensor (6) and the temperature sensor (10) form one whole.
7. A device according to claim 4, **characterized in that** the data processing means (9) are arranged on the inside of the upper wall of the milk claw (1) and one or more further sensors to be contacted with the mixed milk are disposed below the data processing means.
8. A device according to claim 7, **characterized in that** the at least one sensor in or near the place where the milk lines (3) from the milking cups open into the milk claw (1) is formed by a conductivity sensor (6) and the further sensor disposed below the data processing means (9) is formed by all kinds of sensor types, such as a temperature sensor (10).
9. A device according to claim 3, **characterized in that** the data processing means (9) are arranged on the inside of the upper wall of the milk claw (1), while on the side thereof, below the opening of each of the milk lines (3) from the four milking cups into the milk claw (1), a sensor is arranged.
10. A device according to any one of the preceding claims, **characterized in that** in or on the housing there is disposed a supply source (22) without an external supply line.
11. A device according to claim 10, **characterized in that** the supply source (22) is arranged to generate, in use, electric energy on the basis of pulsating air or gas pressure differences in the housing.
12. A device according to claim 11, **characterized in that** the device comprises a solid body which is moved on the basis of the air or gas pressure differences and, while being moved, generates electric energy in an electromagnetic manner.

13. A milk claw (1) comprising a device according to any one of the preceding claims.

5 Patentansprüche

1. Vorrichtung zum Analysieren von Milch, um den Gesundheitszustand von Milchtieren und/oder die Qualität und die Zusammensetzung der von diesen Tieren erhaltenen Milch zu bestimmen, mit einem Melkkreislauf, der Teil einer Melkmaschine ist und mit den zum Verbinden mit den Zitzen der Tiere geeigneten Melkbechern verbunden ist, wobei in dem Melkkreislauf Sensoren (6, 10) in einem Gehäuse angeordnet sind, um für den Gesundheitszustand der Tiere und/oder die Qualität und Zusammensetzung der Milch relevanten Parameter zu bestimmen, wobei die Vorrichtung ferner eine Datenverarbeitungseinrichtung (8) zum Verarbeiten von Signalen, welche diese Parameter angeben und von den Sensoren (6, 10) geliefert werden, und zum Angeben der Verarbeitungsergebnisse aufweist, **dadurch gekennzeichnet, daß** die Datenverarbeitungseinrichtung (9) in oder an dem selben Gehäuse angeordnet sind, in dem auch die Sensoren (6, 10) angeordnet sind.
2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** in oder an dem Gehäuse der Sensoren (6, 10) und der Datenverarbeitungseinrichtung (9) ferner eine Sendeeinrichtung zum Senden der resultierenden Daten an eine an anderem Ort installierte Empfangseinrichtung vorgesehen ist,
3. Vorrichtung nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** das Gehäuse für einen oder mehrere Sensoren (6, 10) und für die Datenverarbeitungseinrichtung (9) durch eine Melkklaue gebildet ist.
4. Vorrichtung nach Anspruch 3, **dadurch gekennzeichnet, daß** in oder nahe der Stelle, an der jede der Milchleitungen von den jeweiligen Melkbechern in die Melkklaue mündet, wenigstens ein Sensor angeordnet ist, der mit der Milch aus einem betreffenden Euterviertel in Kontakt steht, wobei der Sensor elektrisch mit der an der Wand der Melkklaue (1) angebrachten Datenverarbeitungseinrichtung (9) verbunden ist.
5. Vorrichtung nach Anspruch 4, **dadurch gekennzeichnet, daß** in oder nahe der Stelle, an der die Milchleitungen (3) der jeweiligen Melkbecher in die Melkklaue (1) münden, die Sensoren (6, 10) ein Leitfähigkeitssensor (6) und ein Temperatursensor (10) sind.
6. Vorrichtung nach Anspruch 5, **dadurch gekennzeichnet,**

zeichnet, daß der Leitfähigkeitssensor (6) und der Temperatursensor (10) eine Einheit bilden.

7. Vorrichtung nach Anspruch 4, **dadurch gekennzeichnet, daß** die Datenverarbeitungseinrichtung (9) an der Innenseite der oberen Wand der Melkklaue (1) angeordnet ist, und ein oder mehrere weitere Sensoren, die in Kontakt mit der gemischten Milch sind, unter der Datenverarbeitungseinrichtung vorgesehen sind. 5
8. Vorrichtung nach Anspruch 7, **dadurch gekennzeichnet, daß** der wenigstens eine Sensor an oder nahe der Stelle, an der die Milchleitungen (3) der jeweiligen Melkbecher in die Melkklaue (1) mündet, ein Leitfähigkeitssensor (6) ist und der weitere Sensor, der unter der Datenverarbeitungseinrichtung (9) angeordnet ist, durch eine beliebige Art von Sensortyp, beispielsweise einen Temperatursensor (10), gebildet ist. 10
9. Vorrichtung nach Anspruch 3, **dadurch gekennzeichnet, daß** die Datenverarbeitungseinrichtung (9) auf der Innenseite der oberen Wand der Melkklaue (1) angeordnet ist, während an der Seite derselben, unter der Mündung jeder der Milchleitungen (3) der vier Melkbecher in die Melkklaue (1) ein Sensor angeordnet ist. 15
10. Vorrichtung nach Anspruch 3, **dadurch gekennzeichnet, daß** in oder an dem Gehäuse eine Energieversorgungsquelle (22) ohne externe Versorgungsleitung vorgesehen ist. 20
11. Vorrichtung nach Anspruch 10, **dadurch gekennzeichnet, daß** die Energieversorgungsquelle (22) derart ausgebildet ist, daß sie im Gebrauch elektrische Energie auf der Basis pulsierender Luft- oder Gasdruckdifferenzen im Gehäuse erzeugt. 25
12. Vorrichtung nach Anspruch 11, **dadurch gekennzeichnet, daß** die Vorrichtung einen massiven Körper aufweist, der basierend auf den Luftoder Gasdruckdifferenzen bewegt wird und während des Bewegens elektrische Energie auf elektromagnetische Weise erzeugt. 30
13. Melkklaue (1) mit einer Vorrichtung nach einem der vorhergehenden Ansprüche. 35

Revendications

1. Appareil pour analyser le lait afin de déterminer la santé d'animaux producteurs de lait et/ou la qualité et la composition du lait obtenu de ces animaux, comprenant un circuit de traite qui fait partie d'une trayeuse et est relié aux gobelets adaptés pour la 55

connexion aux tétines des animaux, dans lequel des capteurs (6, 10) de circuit de traite sont placés à l'intérieur d'un boîtier pour déterminer des paramètres relatifs à la santé des animaux et/ou la qualité et la composition du lait, lequel appareil comprend en outre des moyens de traitement de données (9) adaptés pour traiter les signaux qui déterminent ces paramètres et qui sont fournis par les capteurs (6, 10) et pour rendre consultables les résultats de leur traitement, **caractérisé en ce que** les moyens de traitement de données (9) sont placés dans ou sur le même boîtier que celui dans lequel ou sur lequel les capteurs (6, 10) sont placés.

2. Appareil selon la revendication 1, **caractérisé en ce que** dans ou sur le boîtier des capteurs (6, 10) et des moyens de traitement de données (9), sont également placés des moyens d'émission pour transmettre les données obtenues à des moyens de réception installés ailleurs. 10
3. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le boîtier pour un ou plusieurs capteurs (6, 10) et pour les moyens de traitement de données (9) est formé par une griffe à lait. 15
4. Appareil selon la revendication 3, **caractérisé en ce que** à l'endroit, ou près de l'endroit, où débouche dans la griffe à lait chacune des conduites de lait provenant des gobelets appropriés, se trouve au moins un capteur destiné à être au contact du lait provenant d'un quartier de mamelle approprié, lequel capteur est connecté électriquement aux moyens de traitement de données fixés à la paroi de la griffe à lait (1). 20
5. Appareil selon la revendication 4, **caractérisé en ce que** à l'endroit, ou près de l'endroit, où débouchent dans la griffe à lait (1) les conduites de lait (3) provenant des gobelets, les capteurs (6, 10) sont constitués d'un capteur de conductivité (6) et d'un capteur de température (10). 25
6. Appareil selon la revendication 5, **caractérisé en ce que** le capteur de conductivité (6) et le capteur de température (10) forment un tout. 30
7. Appareil selon la revendication 4, **caractérisé en ce que** les moyens de traitement de données (9) sont placés sur l'intérieur de la paroi supérieure de la griffe à lait (1) et un ou plusieurs capteurs supplémentaires destinés à être au contact du lait mélangé sont disposés sous les moyens de traitement de données. 35
8. Appareil selon la revendication 7, **caractérisé en ce que** le au moins un capteur à l'endroit, ou près 40

de l'endroit, où débouchent dans la griffe à lait (1) les conduites de lait (3) provenant des gobelets, est constitué d'un capteur de conductivité (6) et le capteur supplémentaire placé sous les moyens de traitement de données (9) est constitué de n'importe quel type de capteur, comme un capteur de température (10).

9. Appareil selon la revendication 3, caractérisé en ce que les moyens de traitement de données (9) sont placés sur l'intérieur de la paroi supérieure de la griffe à lait (1), tandis que sur le côté de celle-ci, sous l'ouverture, dans la griffe à lait (1), de chacune des conduites de lait (3) provenant des quatre gobelets, est placé un capteur.
10. Appareil selon l'une quelconque des revendications précédentes, caractérisé en ce que dans ou sur le boîtier se trouve une source d'alimentation (22) sans ligne d'alimentation extérieure.
11. Appareil selon la revendication 10, caractérisé en ce que la source d'alimentation (22) est adaptée pour produire, en utilisation, de l'énergie électrique en se basant sur l'air pulsé ou sur des différences de pression de gaz dans le boîtier.
12. Appareil selon la revendication 11, caractérisé en ce que l'appareil comprend un corps solide qui est déplacé en fonction des différences de pression d'air ou de gaz et qui, lorsqu'il se déplace, produit de l'énergie électrique de manière électromagnétique.
13. Griffe à lait (1) comprenant un appareil conforme à l'une quelconque des revendications précédentes.

40

45

50

55

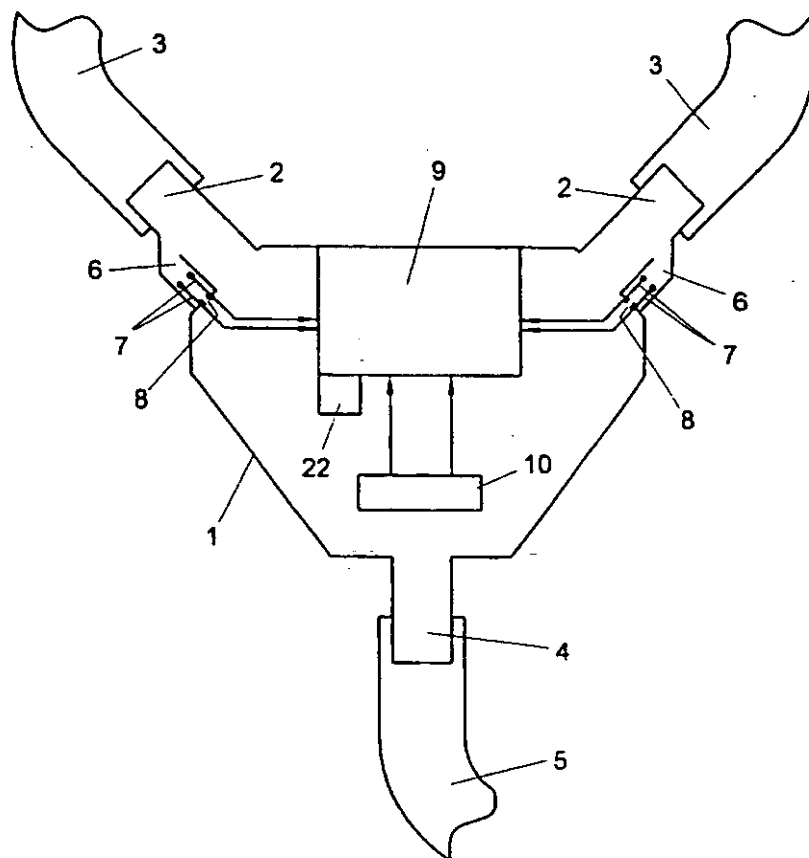


Fig. 1

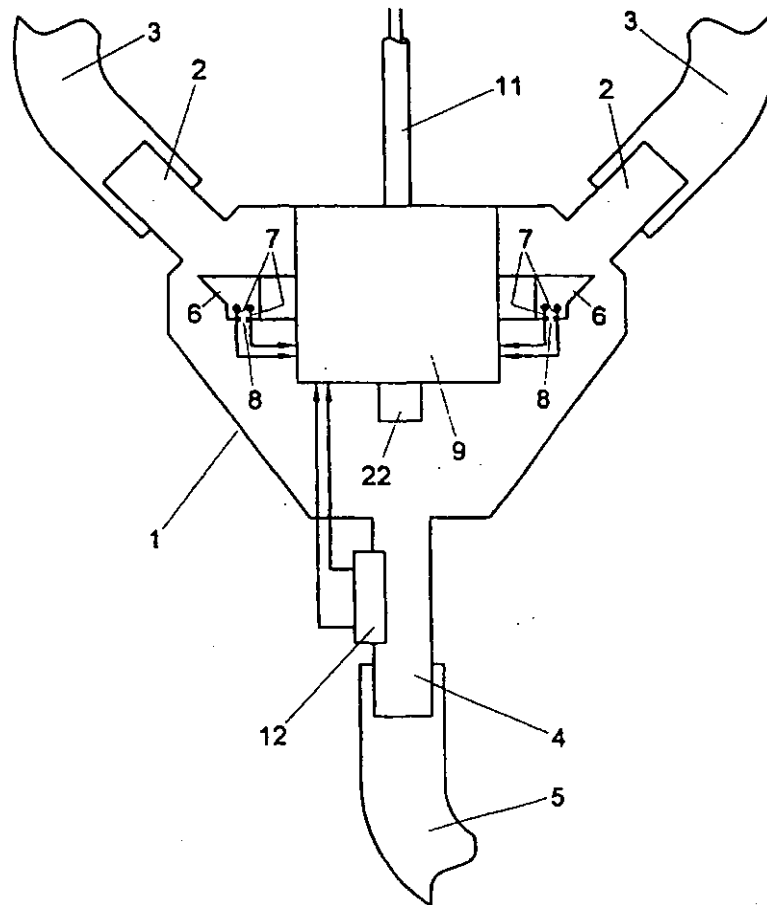


Fig. 2

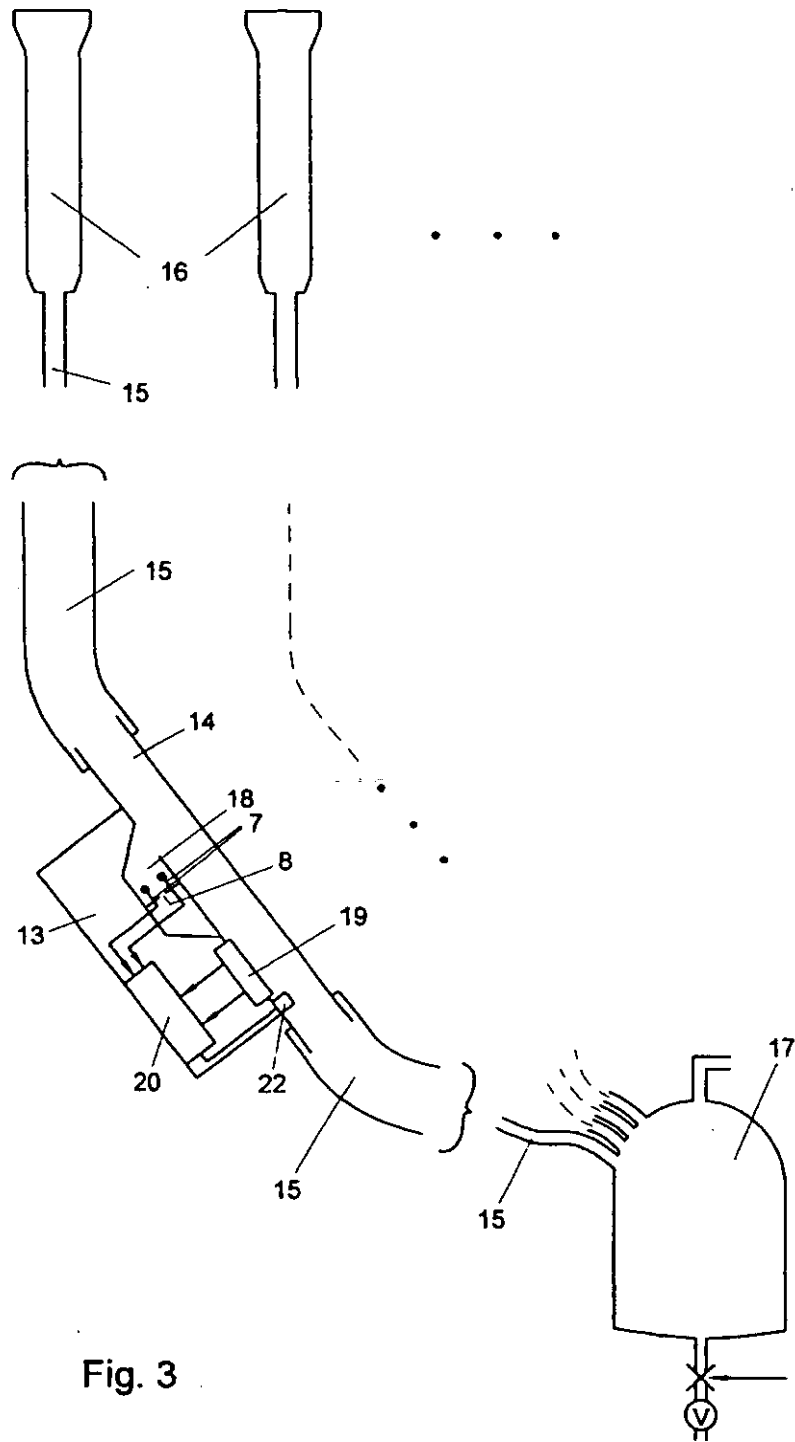


Fig. 3

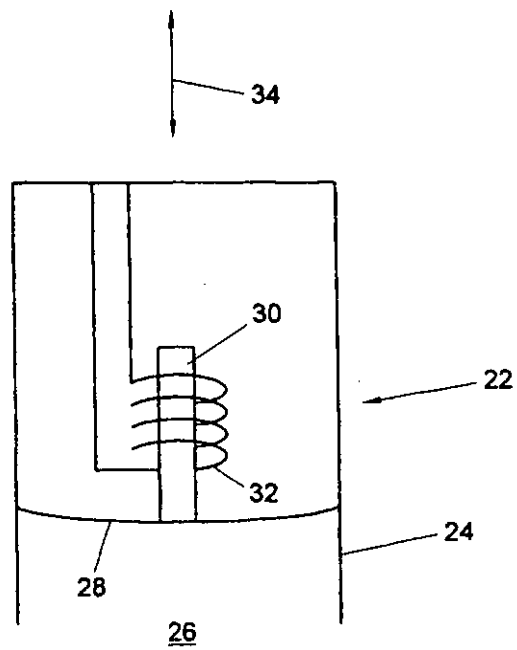


Fig. 4

